



Specifications

		TH-42PZ77U	TH-50PZ77U
Power Source		AC 120 V, 60 Hz	
Power Consumption	Maximum	580 W	695 W
	Standby condition	0.2 W	0.2 W
Plasma Display panel	Drive method	AC type	
	Aspect Ratio	16:9	
	Visible screen size (W x H x Diagonal)	42 " (Diagonal)	50 " (Diagonal)
	(No. of pixels)	36.2 " x 20.4 " x 41.6 " (922 mm x 518 mm x 1,057 mm)	43.5 " x 24.4 " x 49.9 " (1,106 mm x 622 mm x 1,269 mm)
Sound	Audio Output	20 W [10 W + 10 W] (10 % THD)	
	Channel Capability (Digital/Analog)	VHF/ UHF: 2 - 69, CATV: 1 - 135	
Operating Conditions		Temperature: 32 °F – 104 °F (0 °C – 40 °C) Humidity: 20 % – 80 % RH (non-condensing)	
Connection Terminals	INPUT 1-3	VIDEO: RCA PIN Type x 1 1.0 V [p-p] (75 Ω) S-VIDEO: Mini DIN 4-pin Y: 1.0 V [p-p] (75 Ω) C: 0.286 V [p-p] (75 Ω) AUDIO L-R: RCA PIN Type x 2 0.5 V [rms]	
	COMPONENT VIDEO INPUT 1-2	Y: 1.0 V [p-p] (including synchronization) PB, PR: ±0.35 V [p-p] AUDIO L-R: RCA PIN Type x 2 0.5 V [rms]	
	HDMI 1-2	TYPE A Connector x 2	
	AUDIO IN	● This TV supports "HDAVI Control 2" function. AUDIO L-R: RCA PIN Type x 2 0.5 V [rms]	
	Card slot	SD CARD slot x 1	
	AV PROG. OUT	VIDEO: RCA PIN Type x 1 1.0 V [p-p] (75 Ω) AUDIO L-R: RCA PIN Type x 2 0.5 V [rms]	
	DIGITAL AUDIO OUT	PCM / Dolby Digital, Fiber Optic	
FEATURES		3D Y/C FILTER CLOSED CAPTION V-Chip Photo viewer HDAVI Control 2	
Dimensions (W x H x D)	Including pedestal	44.7 " x 27.1 " x 13.0 " (1,134 mm x 688 mm x 330 mm)	52.1 " x 31.6 " x 14.6 " (1,323 mm x 802 mm x 369 mm)
	TV Set only	44.7 " x 25.3 " x 4.6 " (1,134 mm x 641 mm x 116 mm)	52.1 " x 29.7 " x 3.92 " (1,323 mm x 754 mm x 99.5 mm)
Mass	Including pedestal	92.6 lb. (42 kg)	111.3 lb. (50.5 kg)
	TV Set only	77.2 lb. (35 kg)	94.8 lb. (43 kg)

[TH-42PZ77U]

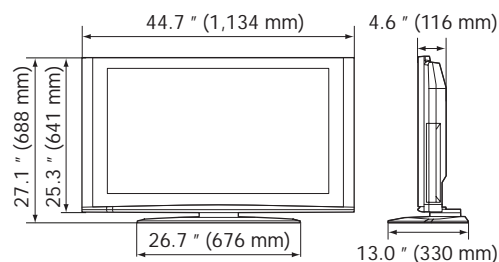

[TH-50PZ77U]

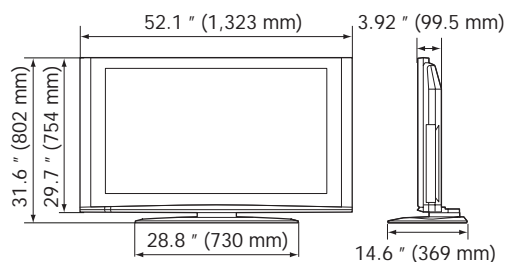

Note

● Design and Specifications are subject to change without notice. Mass and Dimensions shown are approximate.

● Specifications
● Maintenance

FAQs, etc.