


Instructions for B1000 Button Camera

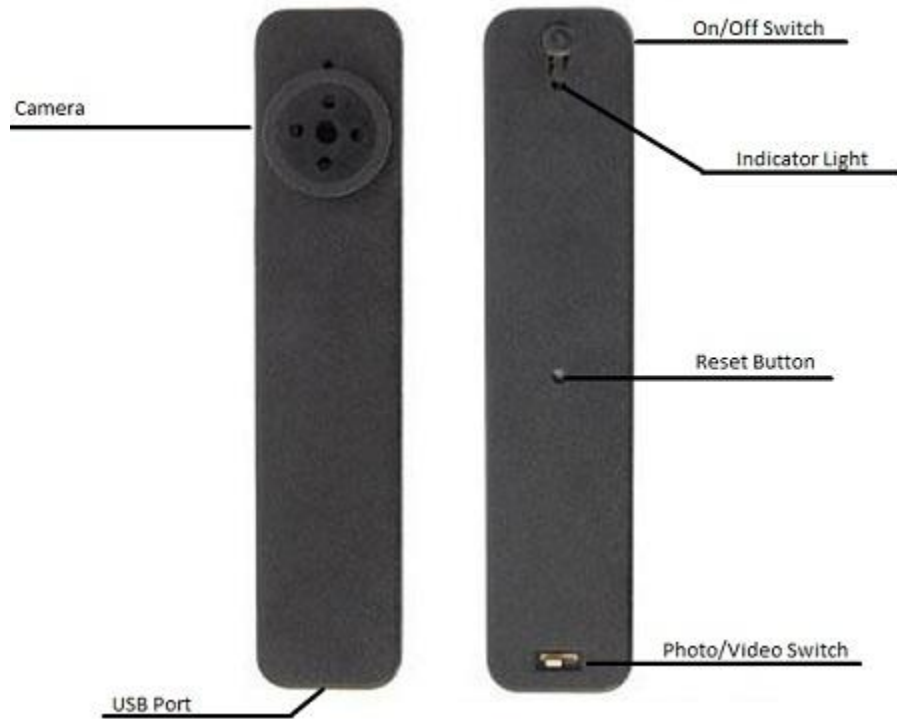

Welcome

Thank you for purchasing the new top of the line B1000. The following product manual will help you to install and operate your new device. Please be sure to fully read the directions before proceeding to use your new B1000 Button Camera.

Operation

- 1.) Before using your new B1000 please be sure to fully charge the device.
 - 2.) To begin recording video with the B1000 simply press and hold down the on/off button for 3 seconds at which point the indicator light will turn blue. After 5 seconds the indicator light should turn yellow and the video will begin recording.
- Note:** Ensure that the photo/video switch is in the video position.

3.) To stop video recording press and hold the on/off button for about one second. The system will remain busy until the light turns blue from its previous yellow color and at this point the video is no longer recording. **Note:** Please do not repeatedly press the button or connect the device immediately to a PC while the device is stopping, wait until the light turns blue. The longer the video the longer it will take to turn blue as the device is saving the footage to its internal memory.

4.) To take a photo, ensure that the photo/video switch is in the photo position then press the on/off button for one second, the indicator light should then flicker blue indicating a picture was taken.

Note: The included metal ring can also be used to activate the shooting modes of the B1000 simply by running it over the device if it is on.

Data Transfer/Charging

1.) To retrieve the files saved on your B1000, simply connect the USB plug to your PC and the Mini USB plug to the B1000 at its base. Your PC should automatically detect the device after it is connected allowing you to view and copy over your pictures and video.

2.) If the B1000 indicator light turns red then the battery is running low. To recharge the device simply connect it just as you would to transfer files to your PC. The indicator light will turn yellow while it is charging, and will turn blue upon fully charging.

Resetting the B1000

1.) To reset the B1000 simply press a pin or other thing object into the reset button hole, gently depressing the button inside.